

Multi - Marker

A class better!



The innovative, multi-purpose Microdot:

- * All-In-One device: Sturdy, reliable, compact, professional
- * PC controlled
- * Logos & Graphics
- * Date & serial numberings with pre- and suffix function
- * Wide range of fonts
- * Linear, circular and angular tags
- * Marking area 100x50mm
- * Optionally available as "portable Version"
- * Perfect Results



Marking area x / y	100 x 50 mm
Height adjustment	310 mm
Marking speed	1 mm/s to 50 mm/s, 1 char/s 3 mm height
Traverse speed	max. 80 mm/s
Marking resolution	0,1 mm, both X/Y axes
Character height	from 1 mm freely editable
Stylus frequency	0 - 100 Hz
Impact force	adjustable
Height compens. of needle	max. 5 mm
Air requirements	100 l/min
Working pressure	max. 6 bar
Dimensions (LxWxH;mm)	
Marking head	149x198x173
Column and base	380x260x680
approx. Weight in kg	
Marking head	4.6
Column and base	8.8
Supply	90-265VAC 50/60 Hz
Memory	1 MB Flash / 1 MB RAM
Font	DIN 1451m, further ones on request
Formats	Linear, angular and circular text, date, counter with pre- and suffix function
Power consumption	20 VA



Multi - Marker

Software "Schillmarker 2"

New graphic interface for easy usage

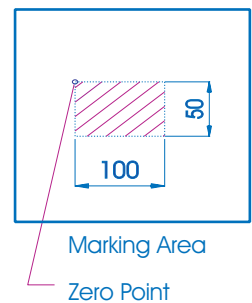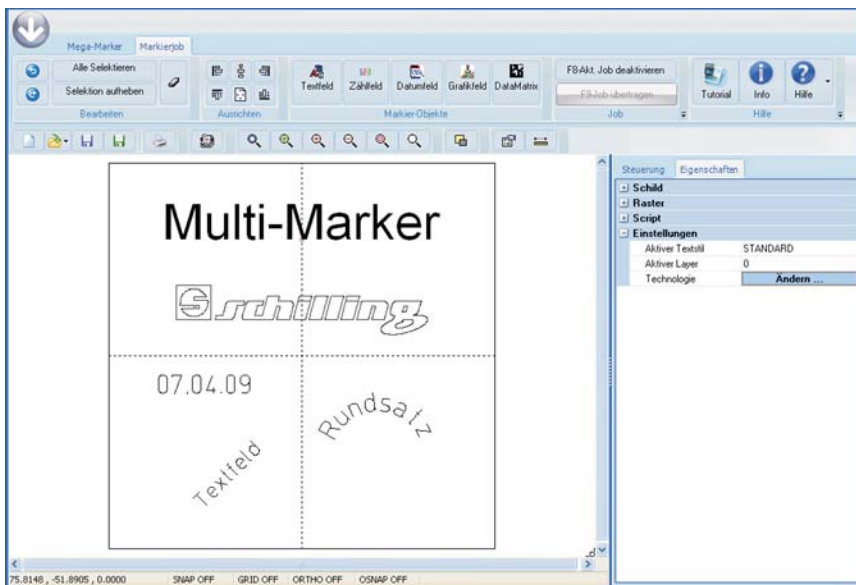

Needle Set for better results



- Light replacement needles with 60° / 90° / 118°
- Normal piston and short piston, with appropriate springs
- O-Ring, washers and allen-key

Art. No.: 66.64SET.3